LL5001A BRASS CHECK VALVE

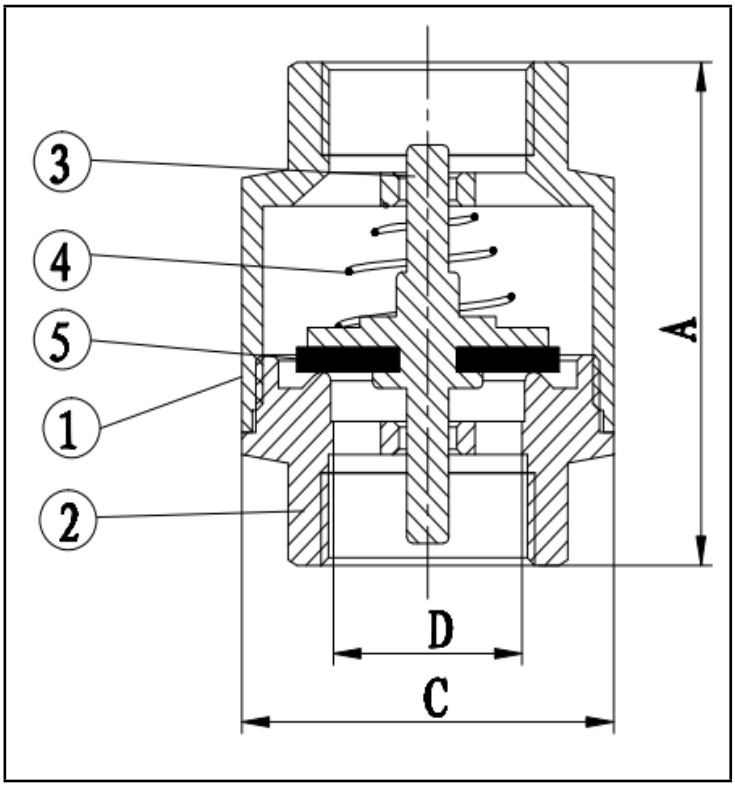

- Suitable for domestic water services, heating and air-conditioning plants, compressed air systems. It can be installed in any position: vertical, horizontal, oblique.

- minimum and maximum working temperature: -10°C, 80°C.

- Threads : ISO228 (equivalent to DIN259 and BS2779)

NO	Parts	Material
1	Body	Brass
2	Bonnet	Brass
3	Core	Brass
4	Spring	Stainless Steel 304#
5	Seal	NBR

Dimension:mms	1/2”	3/4”	1”	1.1/4”	1.1/2”	2”	2.1/2”	3”	4”
A	45.5	52	57.5	62.5	71	78.5	93	100	112
C	36	42	47	59.5	66.5	83	95	110	143
D	18	23	29	36	42.5	53.5	66	79	99
PN	16	16	16	16	16	16	16	16	16