

SWING CHECK VALVE



FEATURES:

- *Applications for Hydraulic, Chemical, Steam, Oil/Gas, Oxygen, Vacuum
- *Investment Cast Stainless Steel Body & Bonnet
- *Bolted Cover, Swing Type
- *For Horizontal or Vertical Line Only
- *Integral Stainless Steel Seat
- *DIN EN10204-3.1 Certificate Available


SPECIFICATION:

- *Flow Bore: full port
- *Rating : ANSI Class 150/300; JIS10K/20K; DIN PN16
- *Temperature: -20°F ~ 400°F
- *Materials: CF8
- *Size range: 1/2" ~ 8"

Standard:

- *Basic Design to API 603; ASME B16.34
- *Flange dimension according to ANSI B 16.5
- *Face-to-face meets to ANSI B16.10
- *Inspection & testing according to API 598

No	Part Name	Material
1	Body	CF8
2	Cover	CF8
3	Disc Nut	SS 304
4	Swing ARM	CF8
5	Hinge Pin	SS 304
6	Gasket	PTFE
7	Bolt	SS 304
8	Disc	CF8
9	Bolt	SS 304

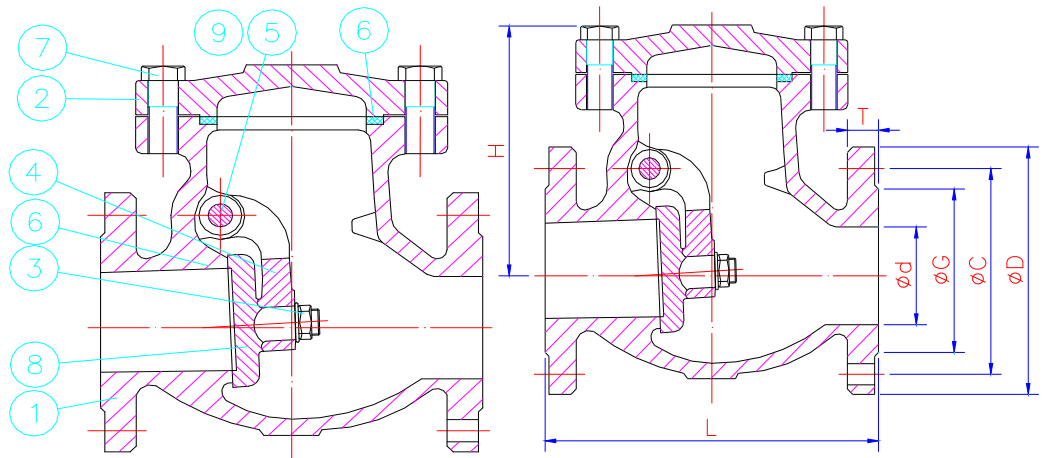

JIS 10K DIMENSIONS

Size	d	L	H	D	C	G	T
				10K	10K	10K	10K
1/2	15	112	65	95	70	51	12
3/4	20	125	70	100	75	56	14
1	25	135	75	125	90	67	14
1-1/2	40	165	107	140	105	81	16
2	50	203	120	155	120	96	16
2-1/2	65	216	135	175	140	116	18
3	80	241	147	185	150	126	18
4	100	292	169	210	175	151	18
5	125	330	190	250	210	182	20
6	150	356	213	280	240	212	22
8	200	495	253	330	290	262	22